



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	Clip type change	JLZ 12/26/14'		

SINGLE ROW
N:NUMBER OF CONTACTS

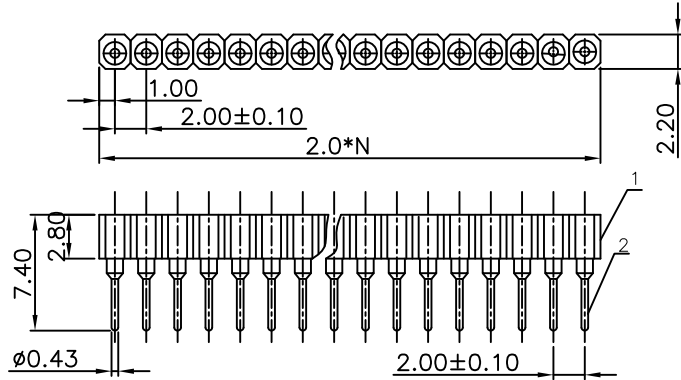

DUAL ROWS
N:NUMBER OF CONTACTS

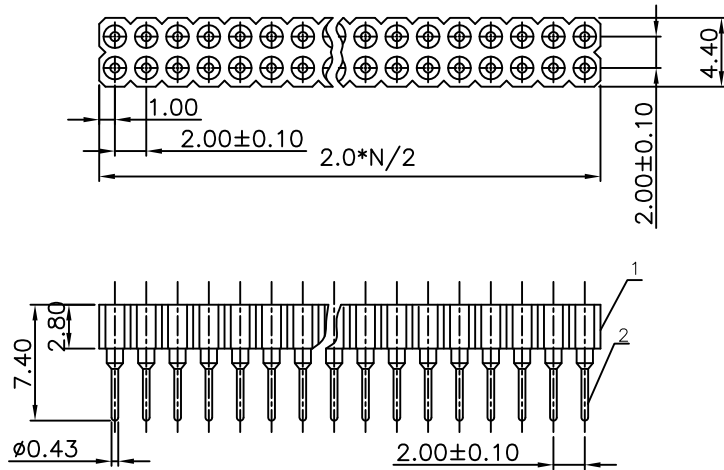

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20 MILLIOHMS Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000 MEGAOHMS Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1002-02
- PRODUCT NUMBER CODE:

DS1002-02 - X X X X

- X: Clip plated
F6: 3u" Gold
T1: Tin
- X: Pin plating
T1: Full Tin
- X: Clip type
B: 6 Fingers (B)
- X: No. of contacts
1*1 - 1*40
2*1 - 2*40
- Series No.
DS1002-02

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	SIP IC SOCKET(SCREW PIN)
UNITS	mm		PITCH2.00mm
SHEET SIZE	A4	SERIES	DS1002-02 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1002-02-XXXX-B		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD