Low frequency transistor 2SA2018 / 2SA2030 / 2SA2119K

The transistor of 500mA class which went only into 2125 size conventionally was attained in 1608 sizes or 1208 sizes.

Applications

For switching, for muting.

Features

- 1) A collector current is large.
- 2) Collector saturation voltage is low.

 $V_{\text{CE (sat)}} \leq 250 mA$


At $I_C = 200 \text{mA} / I_B = 10 \text{mA}$

●Absolute maximum ratings (Ta=25°C)

Parameter	Sy	mbol	Limits	Unit
Collector-base voltage	\	/сво	15	V
Collector-emitter voltage	\	/ _{CEO}	12	V
Collector current	lc		500	mA
Collector current	I _{CP}		1	Α *
Collector power dissipation	Pc	VMT3	150	mW
		EMT3	150	
		SMT3	300	
Junction temperature	Tj		150	°C
Storage temperature	Tstg		-55 to +150	°C
0: 1 D 4			·	

^{*}Single pulse, Pw=1ms

●External dimensions (Unit : mm)

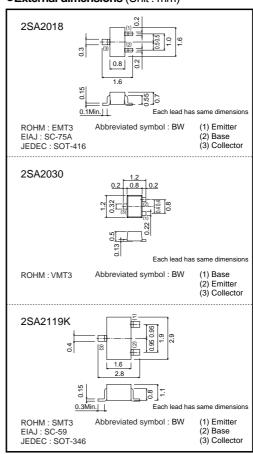

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	15	-	_	V	I _C =10μA
Collector-emitter breakdown voltage	BV _{CEO}	12	_	_	V	I _C =1mA
Emitter-base breakdown voltage	BV _{EBO}	6	_	_	V	I _E =10μA
Collector cutoff current	Ісво	_	_	100	nA	V _{CB} =15V
DC current transfer ratio	hfe	270	_	680	-	Vce=2V / Ic=10mA
Collector-emitter saturation voltage	VCE (sat)	-	100	250	mV	Ic=200mA / Iв=10mA
Transition frequency	f⊤	_	260	_	MHz	Vce=2V, Ie=10mA, fr=100MHz
Output capacitance	Cob	_	6.5	_	pF	Vcb=10V, Ie=0A, f=1MHz

●Packaging specifications and hFE

		Package name		Taping	
Type		Code	T146	TL	T2L
	h _{FE}	Basic ordering unit (pieces)	3000	3000	8000
2SA2119K			0	-	_
2SA2018			-	0	_
2SA2030			_	_	0

Electrical characteristic curves




Fig.1 Grounded Emitter Propagation Characteristics




Fig.2 DC Current Gain vs. Collector Current




Fig.3 Collector-Emitter Saturation Voltage vs. Collector Current (I)




Fig.4 Collector-Emitter Saturation Voltage vs. Collector Current (II)




Fig.5 Base-Emitter Saturation Voltage vs.Collecter Current




Fig.6 Gain Bandwidth Product vs. Emitter Current




Fig.7 Collector Output Capacitance vs. Collector-Base Voltage Emitter Input Capacitance vs. Emitter-Base Voltage

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
 Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

