9001 Series

DIN41612 R Type 150P Male

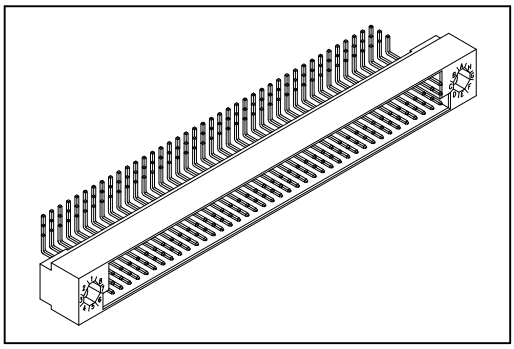

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+125°C.

Features:

* Mates with Female 3Row
  9001-141501C

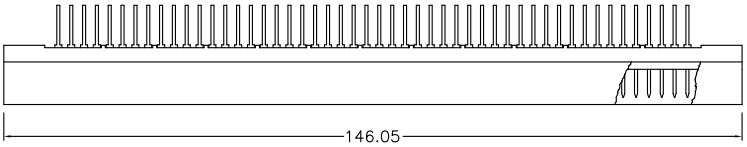

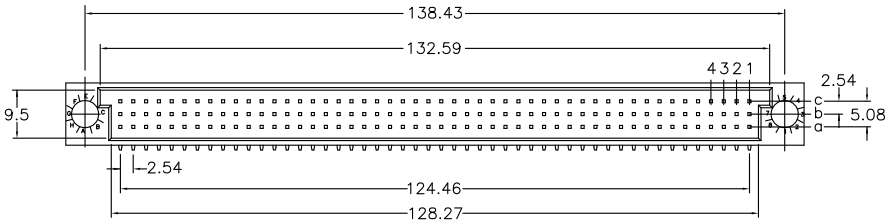



Right Angle Type



Straight Type

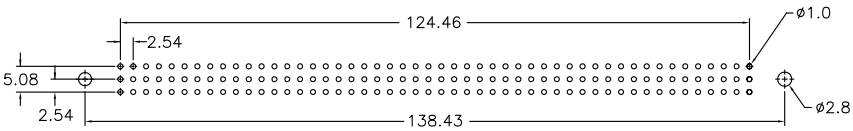

P.C. Board Layout

Dip Length	1	2
Male R/A	2.9	–
Male /STR	4.0	2.5

Ordering information

9001-	1	3	150	1	C	00	A
Series	1: 2.54mm	1: Male R/A 3: Male /STR	Position	1: Dip Length 2: Dip Length	C: Selective Gold Plated	00: G/F	A: Tray Package