


9001 Series

DIN41612 H15 Type Male

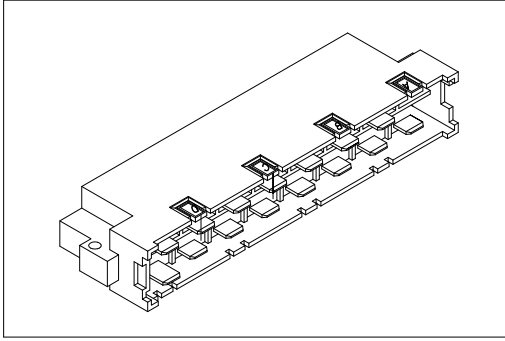

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 A @20°C.

Dielectric Withstanding Voltage: AC 3100V.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 8mΩ max.

Operating Temperature: -55°C ~+125°C.

Features:

- * Power connectors.
- * Mates with 9001-5215.

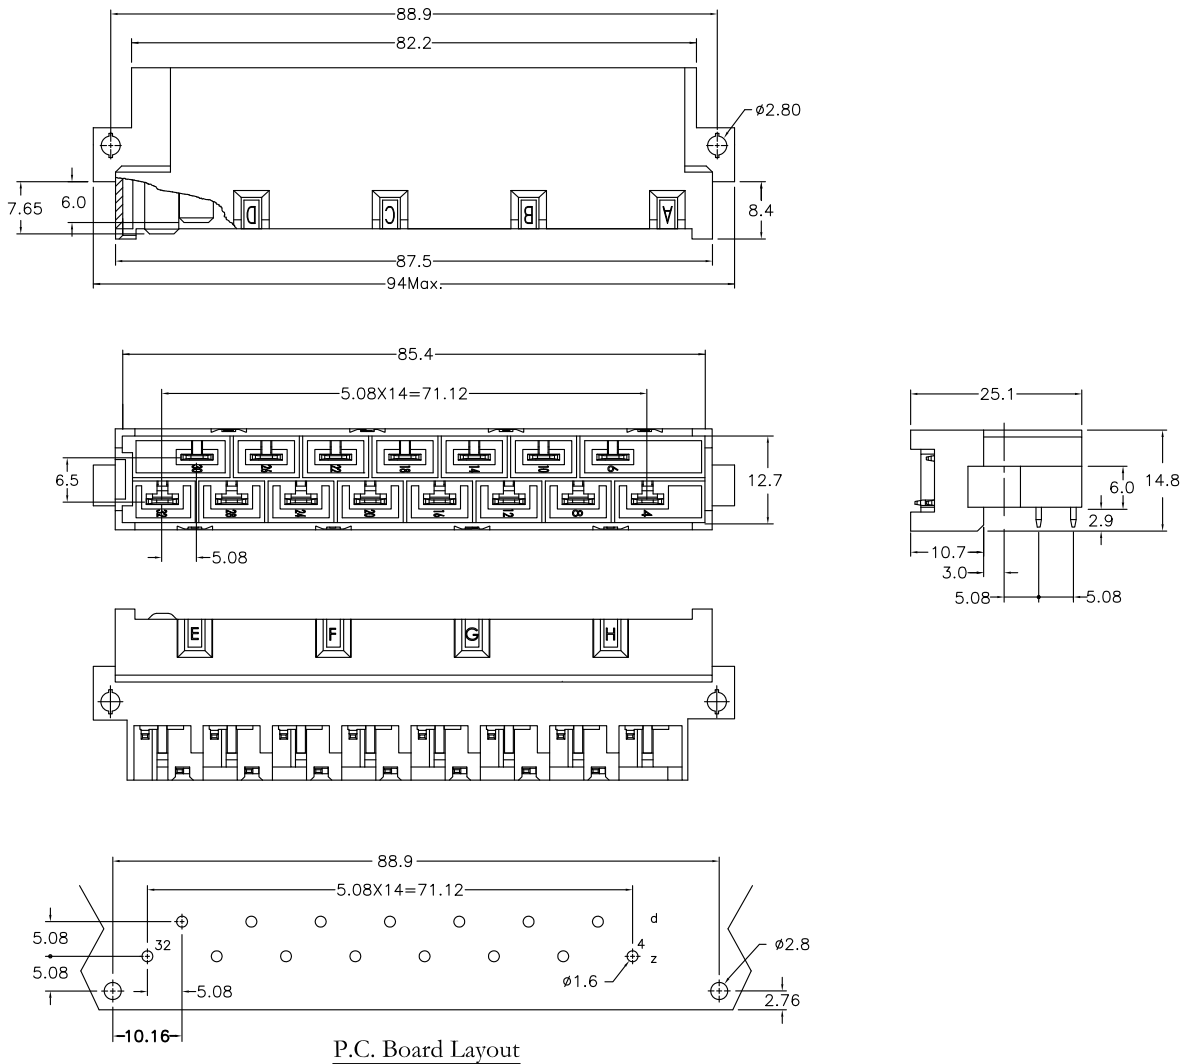

Ordering information

9001-	5	1	15	1	T	A
Series		1: Male	Position	1: Z32 Premating 1.65mm 2: Z4 & Z32 Premating 1.65mm	T: Tin Plating	A: Tray Package

* Additional premating are available upon request, please consult factory.