9001 Series

DIN41612 F Type Male

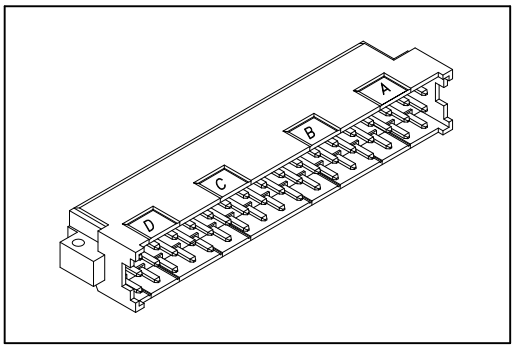

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 A @20°C.
Dielectric Withstanding Voltage: AC 1550V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 15mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:

* Mates with Female 3Row
  9001-62481C,9001-64481C

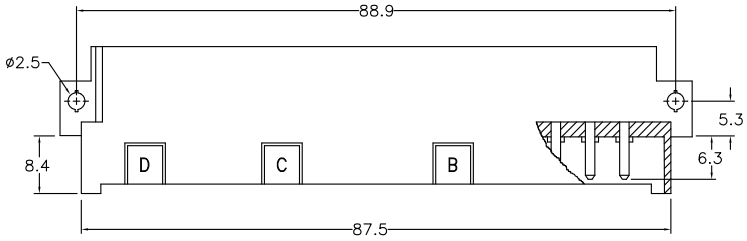

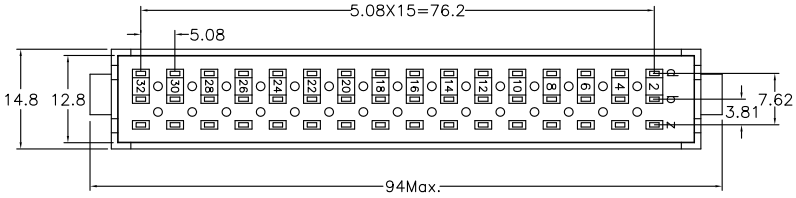



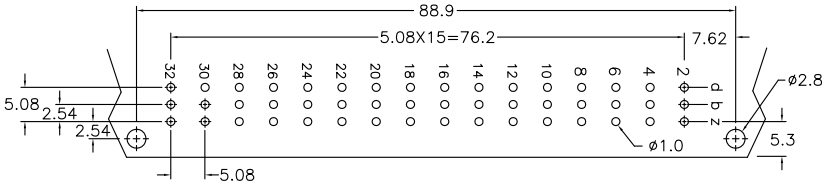

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	
	32	z – d	
	16	z – –	

Ordering information

9001-	6	1	48	1	C	00	A
Series		1: Male	Position	1: Dip Length	C: Selective Gold Plated	00: G/F	A: Tray Package