


9001 Series

DIN41612 Mixed Style H7/F24 Male

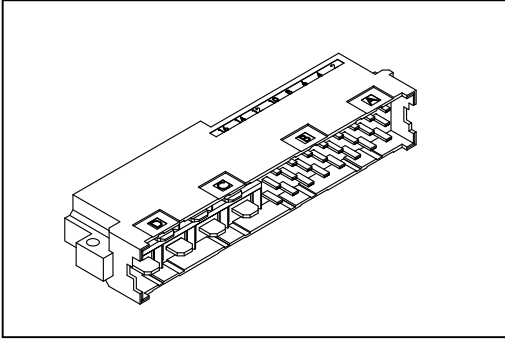

Material:


Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 A / 15 A @20°C.
 Dielectric Withstanding Voltage: F Type AC 1550V.
 H Type AC 3100V.
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: F Type 15mΩ max.
 H Type 8mΩ max.
 Operating Temperature: -55°C ~+125°C.

Features:

- * Power connectors.
- * Mates with 9001-66311C.

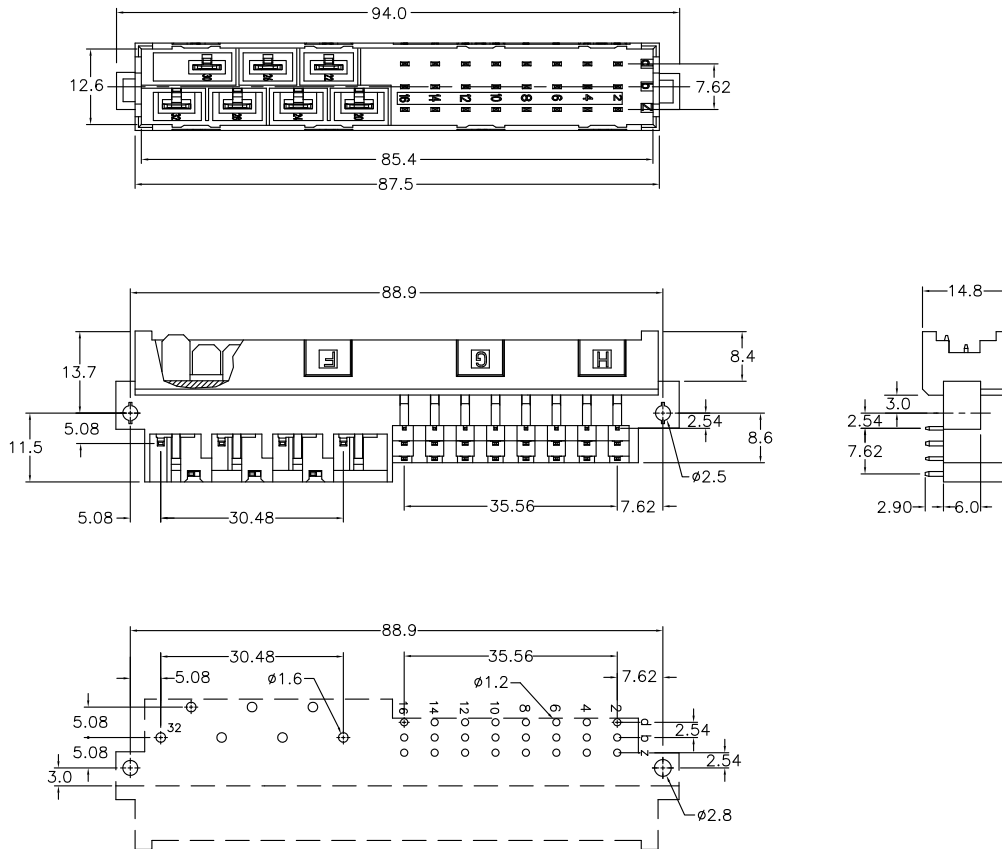

P.C. Board Layout

Ordering information

<u>9001-</u>	<u>65</u>	<u>31</u>	<u>1</u>	<u>C</u>	<u>00</u>	<u>A</u>
Series	5: Male	Position	1: z32 Premating 1.65mm	C: z20~z32 Tin Plating	00: G/F	A: Tray Package
				Other With Selective Gold Plated		