



SEP ELECTRONIC CORP.

S2A thru S2M

2.0 A Surface Mount Silicon Rectifier


Rectifier Reverse Voltage 50 to 1000V



Features

- Ideal for surface mount application
- Surge overload rating to 50A peak
- Plastic material has UL recognition flammability classification 94V-0
- Built-in strain relief

SMB / DO-214AA

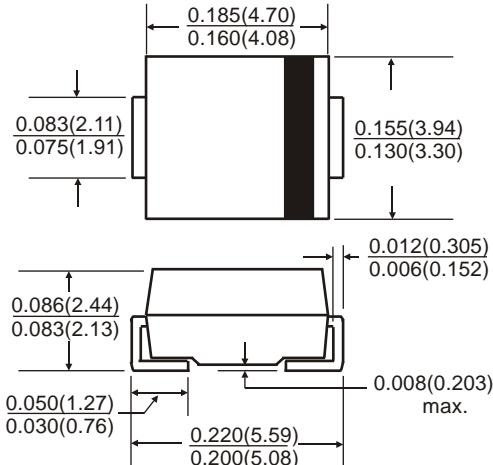

All dimensions inches and (millimeters)

Mechanical Data

Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202F,
Method 208

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.093 grams (approx)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	S2A	S2B	S2D	S2G	S2J	S2K	S2M	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=80°C	IF(AV)					2.0			A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM					50.0			A
Typical thermal resistance per element (1)	ReJA				16				°C/W
Typical junction capacitance per element (2)	Cj				30				pF
Operating junction and storage temperature range	TJ, TSTG				-65 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	S2A	S2B	S2D	S2G	S2J	S2K	S2M	Unit
Maximum instantaneous forward voltage drop per leg at 2.0 A	VF				1.15				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				5.0 125				μA

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.

(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

Rating and Characteristic Curves ($T_A=25^\circ\text{C}$ Unless otherwise noted)
S2A thru S2M

Fig. 1 Derating Curve for Output Rectified Current

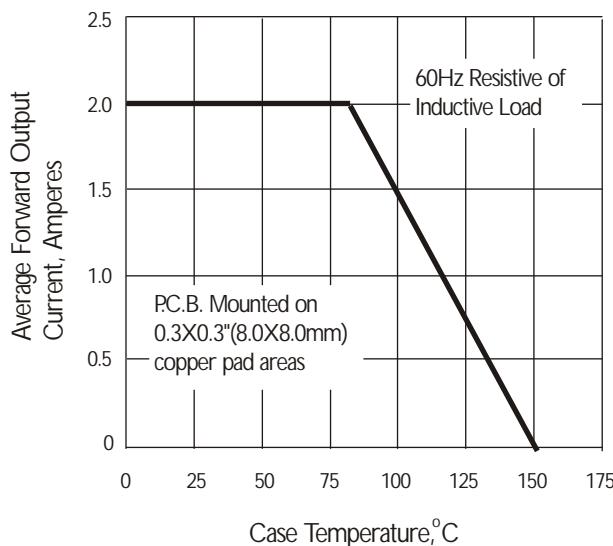


Fig. 3 Typical Instantaneous Forward Characteristics

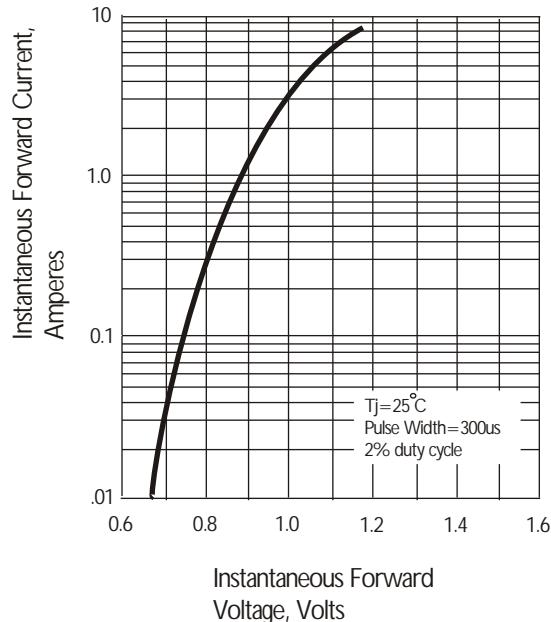


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

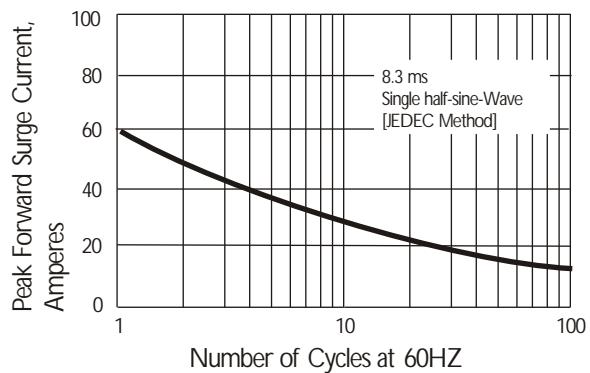


Fig. 4 Typical Reverse Characteristics

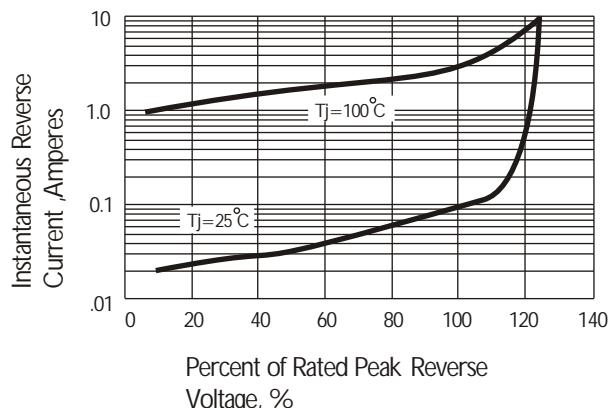


Fig. 5 Typical Junction Capacitance

