







**DG105R-7.5**

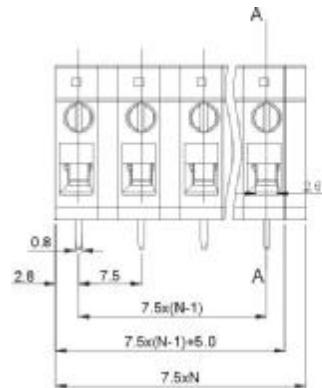

PCB LAYOUT

<b>APPROVAL Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	450V
Rated current	12A	24A
Wire range	30-12AWG	0.5-2.5mm <sup>2</sup>
Withstanding voltage	AC2500V/1Min	

<b>Mechanical</b>	
Torque	0.4Nm(3.5Lb-In)
Ambient temperature	-40°C~+105°C
Strip length	9mm
<b>Dimensions</b>	
pitch	7.5mm(. 295" )
Poles	1P-XXP

<b>Material</b>	
Housing	PA66,UL94V-0
Screws	M2.5,Steel, Cr <sup>3+</sup> Znplated
Pin header	Copper,Tin-plated
Cage	Steel,Cr <sup>3+</sup> Znplated

### HOW TO ORDER :

-  **P** -  - 

X	X	X
Customer Request		


Series number

No. of pole


1	Single pitch
2	Double pitch

#### Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



DEGSON ELECTRONICS CO., LTD.



NAME

**DG105R-7.5**