



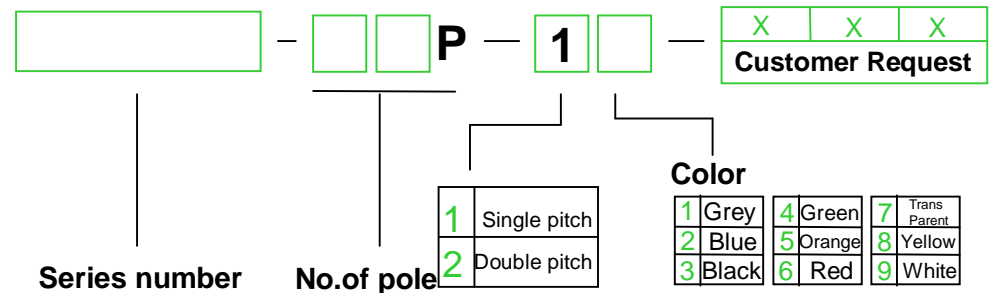

| APPROVAL | | |
|----------------------|-----------------|--------------------|
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 320V |
| Rated current | 10A | 20A |
| Wire range | 26-12AWG | 2.5mm ² |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C~+105 °C | |
| Strip length | 10mm | |
| Dimensions | | |
| Pitch | 5.08mm(.200") | |
| Poles | 2P-12P | |
| Material | | |
| Housing | PA66,UL94 V-0 | |
| Contact | Phosphor bronze | |
| Wire guard | Stainless steel | |

HOW TO ORDER :



| | |
|---|---|
|  mm (INCH) |  DEGSON ELECTRONICS CO., LTD. |
|  THROANGLE PROJECTION | NAME 2EDGKDH-5.08 |