




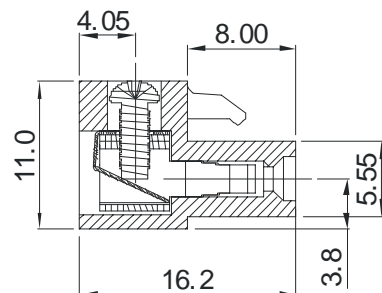



**HT508K-5.08**



<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	150V	320V
Rated current	12A	20A
Wire range	24-12AWG	2.5mm <sup>2</sup>
Withstanding voltage	AC2500V/1Min	
<b>Mechanical</b>		
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	7mm	
<b>Dimensions</b>		
Pitch	5.08mm(.200" )	
Poles	2P-24P	
<b>Material</b>		
Housing	PA66,UL94 V-0	
Screws	M2.5,Steel,Ni-plated	
Contact	Phosphor bronze Ni-plated	
Wire guard	Phosphor bronze	

### HOW TO ORDER :

-  **P** -  - 

X	X	X
---	---	---

  
Customer Request

Series number

No. of pole

1	Single pitch
2	Double pitch

#### Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>HT508K-5.08</b>