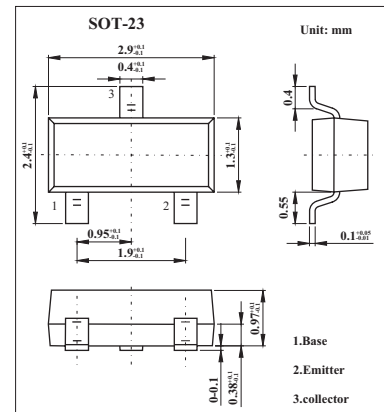


NPN General Purpose Transistors

BCW71,BCW72

■ Features

- Low current (max. 100 mA).
- Low voltage (max. 45 V).
- Low noise.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CB0}	50	V
Collector-emitter voltage	V_{CE0}	45	V
Emitter-base voltage	V_{EB0}	5	V
Collector current	I_C	100	mA
Peak collector current	I_{CM}	200	mA
Peak base current	I_{BM}	200	mA
Total power dissipation	P_{tot}	250	mW
Storage temperature	T_{stg}	-65 to +150	$^\circ\text{C}$
Junction temperature	T_j	150	$^\circ\text{C}$
Operating ambient temperature	R_{amb}	-65 to +150	$^\circ\text{C}$
Thermal resistance from junction to ambient *	$R_{th\ j-a}$	500	K/W

* Transistor mounted on an FR4 printed-circuit board.

BCW71,BCW72

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	ICBO	IE = 0; VCB = 20 V			100	nA
	ICBO	IE = 0; VCB = 20 V; Tj = 100 °C			10	μA
Emitter cutoff current	IEBO	IC = 0; VEB = 5 V			100	μA
DC current gain	BCW71	hFE IC = 10 μA; VCE = 5 V		90		
	BCW72			150		
DC current gain	BCW71	hFE IC = 2 mA; VCE = 5 V	110		120	
	BCW72		200		450	
Collector-emitter saturation voltage	VCE(sat)	IC = 10 mA; IB = 0.5 mA		120	250	mV
		IC = 50 mA; IB = 2.5 mA		210		mV
Base to emitter saturation voltage	VBE(sat)	IC = 10 mA; IB = 0.5 mA		750		mV
		IC = 50 mA; IB = 2.5 mA		850		mV
Base to emitter voltage	VBE	IC = 2 mA; VCE = 5 V	550		700	mV
Collector capacitance	Cc	IE = ie = 0; VCB = 10 V; f = 1 MHz		2.5		pF
Transition frequency	fT	IC = 10 mA; VCE = 5 V; f = 100 MHz	100			MHz
Noise figure	NF	IC = 200 μA; VCE = 5 V; Rs = 2 kΩ; f = 1 kHz; B = 200 Hz			10	dB

■ hFE Classification

TYPE	BCW71	BCW72
Marking	K1	K2