


ER3A THRU ER3J

50V-600V 3.0A

- FEATURES**
- Low cost
 - Low leakage
 - Low forward voltage drop
 - High current capability
 - Easily cleaned with alcohol, Isopropanol and similar solvents
 - The plastic material carries U/L recognition 94V-0

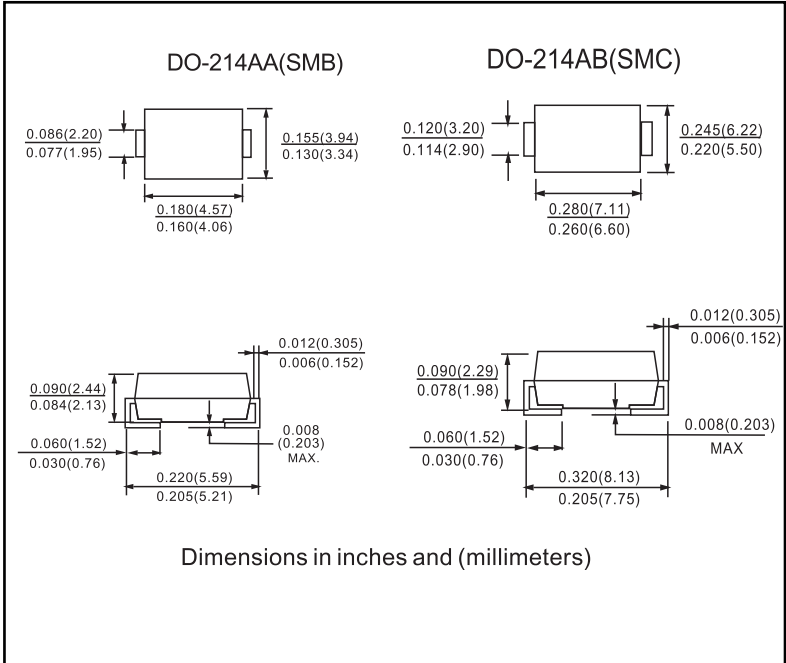

MECHANICAL DATA

Case: JEDEC DO-214AA, molded plastic
 Terminals: Solderable per MIL-STD-202, Method 208
 Polarity: Color band denotes cathode
 Weight: 0.003 ounces, 0.093 grams
 Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ER3A	ER3B	ER3C	ER3D	ER3E	ER3G	ER3J	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	V
Maximum average forward rectified current @ $T_A=75^\circ C$	$I_{F(AV)}$	3.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	100							A
Maximum instantaneous forward voltage @ 3.0A	V_F	0.95			1.25		1.7		V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=125^\circ C$	I_R	5.0 300							μA
Maximum reverse recovery time (Note 1)	t_{rr}	35							ns
Typical junction capacitance (Note 2)	C_J	95							pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	40							$^\circ C/W$
Operating junction temperature range	T_J	- 55 ----- + 150							$^\circ C$
Storage temperature range	T_{STG}	- 55 ----- + 150							$^\circ C$


NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Thermal resistance junction to ambient.

RATINGS AND CHARACTERISTIC CURVES ER3A THRU ER3J

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1MΩ .22pF.
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω.



SET TIME BASE FOR 10 ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC

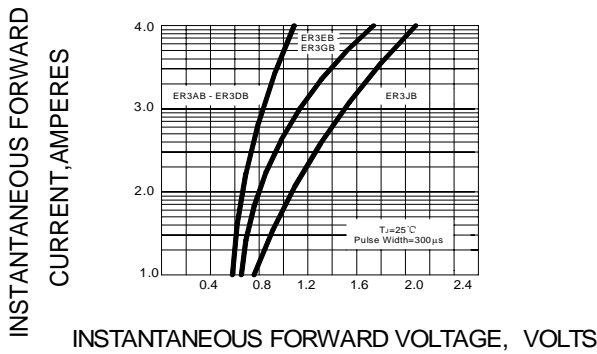


FIG.3 – FORWARD DERATING CURVE

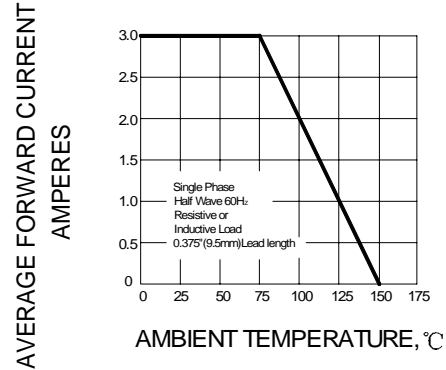


FIG.4 – TYPICAL JUNCTION CAPACITANCE

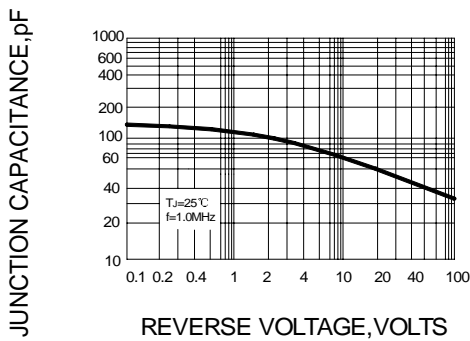


FIG.5 – PEAK FORWARD SURGE CURRENT

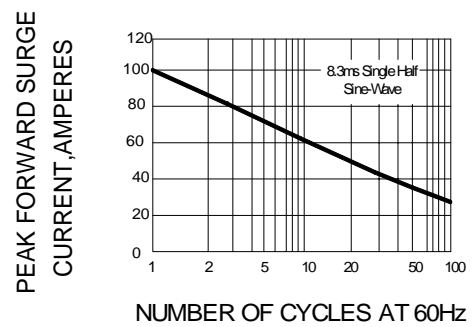


FIG.6 – TYPICAL REVERSE CHARACTERISTICS

